

#### **70 Series Fittings** Use with 701, F42 hoses.

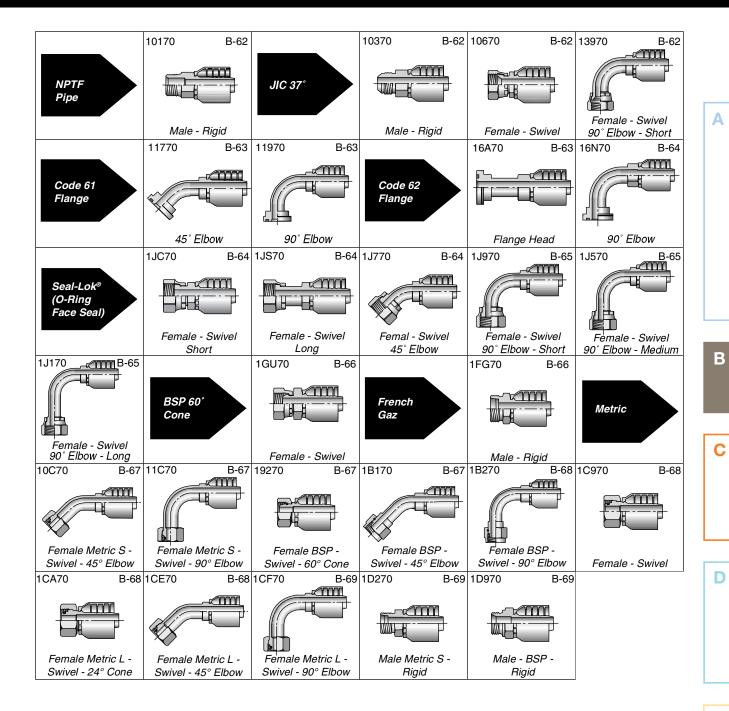

E


#### 10170

Male NPTF Pipe - Rigid



| <b>#</b><br>Part | Thread | Hose I.D. |      | A  |      | E    |    |
|------------------|--------|-----------|------|----|------|------|----|
| Number           | inch   | inch      | inch | mm | inch | inch | mm |
| 10170-6-6        | 3/8x18 | 3/8       | 2.37 | 60 | 3/4  | 1.47 | 37 |
| 10170-8-8        | 1/2x14 | 1/2       | 2.84 | 72 | 7/8  | 1.40 | 36 |

#### **10370** Male JIC 37° - Rigid



| <b>#</b><br>Part |                | ·····  | Hose I.D. |      |          |       | в    |    |  |
|------------------|----------------|--------|-----------|------|----------|-------|------|----|--|
| Number           | Thread<br>inch |        | inch      | inch | <b>_</b> | inch  | inch | mm |  |
| 10370-8-8        | 1/2            | 3/4x16 | 1/2       | 2.68 | 68       | 7/8   | 1.47 | 37 |  |
| 10370-10-8       | 5/8            | 7/8x14 | 1/2       | 2.62 | 66       | 15/16 | 1.41 | 36 |  |


#### 10670

Female JIC 37° - Swivel

| <b>#</b><br>Part | Part Thread Hose I.D. |         | 4    | Ą    | H  | $\bigcirc$ | E     | 3    |    |
|------------------|-----------------------|---------|------|------|----|------------|-------|------|----|
| Number           |                       | inch    | inch | inch | mm | inch       | inch  | inch | mm |
| 10670-6-6        | 3/8                   | 9/16x18 | 3/8  | 2.29 | 58 | 11/16      | 11/16 | 1.39 | 35 |
| 10670-8-8        | 1/2                   | 3/4x16  | 1/2  | 2.62 | 67 | 13/16      | 7/8   | 1.41 | 36 |
| 10670-10-8       | 5/8                   | 7/8x14  | 1/2  | 2.85 | 72 | 7/8        | 1     | 1.64 | 42 |
| 10670-10-10      | 5/8                   | 7/8x14  | 5/8  | 2.84 | 72 | 15/16      | 1     | 1.59 | 40 |

#### **13970** Female JIC 37° - Swivel - 90° Elbow - Short Drop

| <b>#</b><br>Part |     | ······ | Hose I.D. | 4    | A. | E    |    | $\bigcirc$ | E    | 3  |
|------------------|-----|--------|-----------|------|----|------|----|------------|------|----|
| Number           |     | inch   | inch      | inch | mm | inch | mm | inch       | inch | mm |
| 13970-8-8        | 1/2 | 3/4x16 | 1/2       | 2.62 | 67 | 1.14 | 29 | 7/8        | 1.41 | 36 |



В

มานี

∖\_н

m



D

Α


Β

С

### 11770

SAE Code 61 Flange Head - 45° Elbow ISO 12151-3 - 45S - L


| <b>#</b><br>Part | Flange | Hose I.D. |      | <b>A</b> |      | Ę  |        | E    | 3  |
|------------------|--------|-----------|------|----------|------|----|--------|------|----|
| Number           | inch   | inch      | inch | mm       | inch | mm | inch   | inch | mm |
| 11770-8-8        | 1/2    | 1/2       | 3.28 | 83       | 0.77 | 20 | 1-3/16 | 2.07 | 53 |
| 11770-12-10      | 3/4    | 5/8       | 3.37 | 86       | 0.76 | 19 | 1-1/2  | 2.12 | 54 |



### 11970


SAE Code 61 Flange Head - 90° Elbow ISO 12151-3 - E90S - L

| <b>#</b><br>Part | Flange | Hose I.D. |      | A  |      | E  |        | B    |    |
|------------------|--------|-----------|------|----|------|----|--------|------|----|
| Number           | inch   | inch      | inch | mm | inch | mm | inch   | inch | mm |
| 11970-8-8        | 1/2    | 1/2       | 2.93 | 74 | 1.60 | 41 | 1-3/16 | 1.72 | 44 |
| 11970-12-10      | 3/4    | 5/8       | 3.54 | 90 | 2.02 | 51 | 1-1/2  | 2.29 | 58 |



#### **16A70 SAE Code 62 Flange Head** ISO 12151-3 - S - S

| #         |        |           |      | •    | Ø     | в    |      |  |  |
|-----------|--------|-----------|------|------|-------|------|------|--|--|
| Part      | Flange | Hose I.D. |      | 4    | F     | E    | 3    |  |  |
| Number    | inch   | inch      | inch | mm   | inch  | inch | mm   |  |  |
| 16A70-8-8 | 1/2    | 1/2       | 3.50 | 88,9 | 1-1/4 | 2.29 | 56,9 |  |  |



Β

С

Α

D

E

See Accessories Section for O-Rings and Flange Kits.



В

В

Ν

-н

C

#### 16N70

**SAE Code 62 Flange Head - 90° Elbow** ISO 12151-3 - E90S - S ( 1 Piece: ISO 12151-3 - E90M - S)

| <b>#</b><br>Part | Flange | Hose I.D. |      | <b>A</b> | E    | Ē  | Ø<br>F | B    |    |
|------------------|--------|-----------|------|----------|------|----|--------|------|----|
| Number           | inch   | inch      | inch | mm       | inch | mm | inch   | inch | mm |
| 16N70-8-8        | 1/2    | 1/2       | 2.60 | 66       | 1.61 | 41 | 1-1/4  | 1.34 | 34 |

### 1JC70

Female Seal-Lok® - Swivel - Short ISO 12151- 1 - SWSA

| <b>#</b><br>Part |     | Minead   | Hose I.D. | <b>A</b> |    | C    |    | $\bigcap_{\mathbf{H}} \bigotimes_{\mathbf{W}}$ |       | B    |    |
|------------------|-----|----------|-----------|----------|----|------|----|--|-------|------|----|
| Number           |     | inch     | inch      | inch     | mm | inch | mm | inch   | inch  | inch | mm |
| 1JC70-6-6        | 3/8 | 11/16x16 | 3/8       | 1.94     | 49 | 0.34 | 9  | 11/16  | 13/16 | 1.04 | 26 |
| 1JC70-8-6        | 1/2 | 13/16x16 | 3/8       | 2.00     | 51 | 0.43 | 11 | 13/16  | 15/16 | 1.10 | 28 |
| 1JC70-8-8        | 1/2 | 13/16x16 | 1/2       | 2.22     | 56 | 0.43 | 11 | 13/16  | 15/16 | 1.01 | 26 |
| 1JC70-10-10      | 5/8 | 1x14     | 5/8       | 2.40     | 61 | 0.53 | 13 | 15/16  | 1-1/8 | 1.15 | 29 |

### 1**J**S70

Female Seal-Lok® - Swivel - Long ISO 12151-1 - SWSB

| #              | ۵              | ~~~~~     |                   |      |    | $\bigcirc$ | $\bigcirc$ |           |         |
|----------------|----------------|-----------|-------------------|------|----|------------|------------|-----------|---------|
| Part<br>Number | Thread<br>inch |           | Hose I.D.<br>inch | inch | mm | H<br>inch  | W          | E<br>inch | s<br>mm |
| 1JS70-6-6      | 3/8            | 11/16x16  | 3/8               | 2.28 |    | 11/16      |            |           | 35      |
| 1JS70-8-8      | 1/2            | 13/16x16  | 1/2               | 2.65 | 67 | 13/16      | 15/16      | 1.44      | 37      |
| 1JS70-12-8     | 3/4            | 1-3/16x12 | 1/2               | 2.90 | 74 | 1-1/8      | 1-3/8      | 1.69      | 43      |
| 1JS70-12-10    | 3/4            | 1-3/16x12 | 5/8               | 3.10 | 79 | 1-1/8      | 1-3/8      | 1.85      | 47      |

## 1J770

Female Seal-Lok<sup>®</sup> - Swivel - 45° Elbow


ISO 12151-1 - SWE45

| <b>#</b><br>Part |     | www.<br>hread | Hose I.D. | ļ    | <b>A</b> | E    | Ē  | $\bigvee_{\mathbf{w}}$ | E    | 3  |
|------------------|-----|---------------|-----------|------|----------|------|----|------------------------|------|----|
| Number           | i   | nch           | inch      | inch | mm       | inch | mm | inch                   | inch | mm |
| 1J770-10-10      | 5/8 | 1x14          | 5/8       | 3.08 | 78       | 0.63 | 16 | 1-1/8                  | 1.83 | 46 |

в TTT W

See Accessories Section for O-Rings and Flange Kits.





E

Α

Β

С

D

### 1**J**970


Female Seal-Lok<sup>®</sup> - Swivel - 90° Elbow - Short Drop ISO 12151-1 - SWES90


| <b>#</b><br>Part | Thread Hose I.D. |           | A    |      | Ę  |      | $\bigvee_{\mathbf{w}}$ | E     | 3    |    |
|------------------|------------------|-----------|------|------|----|------|------------------------|-------|------|----|
| Number           |                  | inch      | inch | inch | mm | inch | mm                     | inch  | inch | mm |
| 1J970-8-8        | 1/2              | 13/16x16  | 1/2  | 2.59 | 66 | 1.14 | 29                     | 15/16 | 1.38 | 35 |
| 1J970-12-8       | 3/4              | 1-3/16x12 | 1/2  | 3.21 | 82 | 1.88 | 48                     | 1-3/8 | 2.00 | 51 |

### 1J570

Female Seal-Lok<sup>®</sup> - Swivel - 90° Elbow - Medium Drop ISO 12151-1 - SWEM90

| <b>#</b><br>Part | Thread   | Hose I.D. | Å    | AE      |      | E  | $\bigcirc$ w | E    | 3  |
|------------------|----------|-----------|------|---------|------|----|--------------|------|----|
| Number           | inch     | inch      | inch | inch mm |      | mm | inch         | inch | mm |
| 1J570-10-10      | 5/8 1x14 | 5/8       | 2.88 | 73      | 1.85 | 47 | 1-1/8        | 1.63 | 41 |






## 1J170

Female Seal-Lok<sup>®</sup> - Swivel - 90° Elbow - Long Drop ISO 12151-1 - SWEL90

| <b>#</b><br>Part |     | WWWW     | Hose I.D. |      | Ą  |      | Ę  |       | В    |    |
|------------------|-----|----------|-----------|------|----|------|----|-------|------|----|
| Number           |     | inch     | inch      | inch | mm | Inch | mm | inch  | inch | mm |
| 1J170-8-8        | 1/2 | 13/16x16 | 1/2       | 2.59 | 66 | 2.52 | 65 | 15/16 | 1.38 | 35 |
| 1J170-10-10      | 5/8 | 1x14     | 5/8       | 2.88 | 73 | 2.76 | 70 | 1-1/8 | 1.63 | 41 |



Β

Α


E

See Accessories Section for O-Rings and Flange Kits.



#### 1GU70


Female BSP Parallel Pipe - Swivel - (60° Cone)



| #         | <u></u> |           |      |          | $\bigcirc$ | $\bigcirc$ |      |    |
|-----------|---------|-----------|------|----------|------------|------------|------|----|
| Part      | Thread  | Hose I.D. |      | <b>A</b> | Н          | W          | E    | 3  |
| Number    | Inch    | inch      | inch | mm       | mm         | inch       | inch | mm |
| 1GU70-6-6 | 3/8x19  | 3/8       | 2.45 | 62       | 22         | NA         | 1.55 | 39 |
| 1GU70-8-8 | 1/2x14  | 1/2       | 2.82 | 72       | 27         | NA         | 1.61 | 41 |

### 1FG70

Male French Gaz Series - Rigid - (24° Cone)



| #           | 2  | ·····   |           |      |    |      | $\geq$ | _    |    |  |
|-------------|----|---------|-----------|------|----|------|--------|------|----|--|
| Part        | 1  | Thread  | Hose I.D. | A    | •  | F    | 1      | B    |    |  |
| Number      |    | mm      | inch      | inch | mm | inch | mm     | inch | mm |  |
| 1FG70-21-10 | 21 | M30x1,5 | 5/8       | 2.87 | 73 | 1.18 | 30     | 1.62 | 41 |  |




Α

D

### 10C70

Female Metric S - Swivel - 45° Elbow - (24° Cone with O-Ring) ISO 12151-2 - SWE45


| <b>#</b><br>Part |    | www.    | Hose I.D. | Д    |    | E    |    | $\bigvee_{\mathbf{w}}$ | E    | 3  |
|------------------|----|---------|-----------|------|----|------|----|------------------------|------|----|
| Number           |    | mm      | inch      | inch | mm | inch | mm | mm                     | inch | mm |
| 10C70-12-6       | 12 | M20x1,5 | 3/8       | 2.72 | 69 | 0.79 | 20 | 24                     | 1.57 | 40 |
| 10C70-16-8       | 16 | M24x1,5 | 1/2       | 3.27 | 83 | 0.94 | 24 | 30                     | 1.89 | 48 |
| 10C70-20-10      | 20 | M30x2   | 5/8       | 3.58 | 91 | 0.98 | 25 | 36                     | 2.05 | 52 |



# 11C70

Female Metric S - Swivel - 90° Elbow - (24° Cone with O-Ring) ISO 12151-2 - SWE

| <b>#</b><br>Part |    | www.    | Hose I.D. |      | A  | E    | Ē  | $\bigvee_{\mathbf{w}}$ | E    | 3  |
|------------------|----|---------|-----------|------|----|------|----|------------------------|------|----|
| Number           |    | mm      | inch      | inch | mm | inch | mm | mm                     | inch | mm |
| 11C70-12-6       | 12 | M20X1,5 | 3/8       | 2.64 | 67 | 1.46 | 37 | 24                     | 1.50 | 38 |
| 11C70-20-10      | 20 | M30X2   | 5/8       | 3.11 | 79 | 1.89 | 48 | 36                     | 1.57 | 40 |



w


# 19270


Female BSP Parallel Pipe - Swivel - (60° Cone) ISO 228-1

| <b>#</b><br>Part | Thread | Hose I.D. | A    |    | C    | ;  | w  | E    | 3  |
|------------------|--------|-----------|------|----|------|----|----|------|----|
| Number           | inch   | inch      | inch | mm | inch | mm | mm | inch | mm |
| 19270-6-6        | 3/8x19 | 3/8       | 1.93 | 49 | 0.28 | 7  | 22 | 0.79 | 20 |
| 19270-8-8        | 1/2x14 | 1/2       | 2.24 | 57 | 0.28 | 7  | 27 | 0.87 | 22 |
| 19270-10-10      | 5/8x14 | 5/8       | 2.24 | 57 | 0.35 | 9  | 30 | 0.83 | 21 |
| 19270-12-10      | 3/4x14 | 5/8       | 2.40 | 61 | 0.35 | 9  | 32 | 0.87 | 22 |

# 1B170


Female BSP Parallel pipe - Swivel- 45° Elbow - (60° Cone) ISO 228-1







Α



1**B**270

Female BSP Parallel Pipe - Swivel - 90° Elbow - (60° Cone) ISO 228-1

| <b>#</b><br>Part | ////////////////////////////////////// | Hose I.D. | 4    | <b>L</b> | E    |    | $\bigvee_{\mathbf{w}}$ | E    | 3  |
|------------------|--|-----------|------|----------|------|----|------------------------|------|----|
| Number           | inch                                   | inch      | inch | mm       | inch | mm | mm                     | inch | mm |
| 1B270-8-8        | 1/2x14                                 | 1/2       | 2.76 | 70       | 1.54 | 39 | 27                     | 1.38 | 35 |
| 1B270-10-10      | 5/8x14                                 | 5/8       | 3.07 | 78       | 1.81 | 46 | 30                     | 1.61 | 41 |
| 1B270-12-10      | 3/4x14                                 | 5/8       | 3.19 | 81       | 1.65 | 42 | 32                     | 1.61 | 41 |

### 1C970

#### Female Metric S - Swivel - (24° Cone with O-Ring)

| <b>#</b><br>Part |    | ·····   | Hose I.D. | Å    | <b>4</b> | C    | ;  | $\bigvee_{\mathbf{w}}$ | E    | 3  |
|------------------|----|---------|-----------|------|----------|------|----|------------------------|------|----|
| Number           |    | mm      | inch      | inch | mm       | inch | mm | mm                     | inch | mm |
| 1C970-12-6       | 12 | M20x1,5 | 3/8       | 2.03 | 52       | 0.03 | 1  | 24                     | 1.13 | 29 |
| 1C970-16-8       | 16 | M24x1,5 | 1/2       | 2.31 | 59       | 0.09 | 2  | 30                     | 1.10 | 28 |
| 1C970-20-10      | 20 | M30x2   | 5/8       | 2.51 | 64       | 0.05 | 1  | 36                     | 1.26 | 32 |

When measuring overall length to end of nut, B + C dimensions must be used to calculate cut-off allowance.

# 1CA70

#### Female Metric L - Swivel - (24° Cone with O-Ring)


ISO 12151-2 - SWS

| <b>#</b><br>Part |    | Minead  | Hose I.D. | ۵    | L. | c    | ;   | w  | E    | 3  |
|------------------|----|---------|-----------|------|----|------|-----|----|------|----|
| Number           |    | mm      | inch      | inch | mm | inch | mm  | mm | inch | mm |
| 1CA70-12-6       | 12 | M18x1,5 | 3/8       | 2.09 | 53 | 0.04 | 1   | 22 | 0.94 | 24 |
| 1CA70-15-8       | 15 | M22x1,5 | 1/2       | 2.09 | 62 | 0.07 | 2   | 22 | 0.94 | 27 |
| 1CA70-18-10      | 18 | M26x1,5 | 5/8       | 2.44 | 62 | 0.02 | 0.5 | 32 | 1.02 | 26 |

### 1CE70

Female Metric L - Swivel - 45° Elbow - (24° Cone with O-Ring) ISO 12151-2 - SWE45

| #           |            |           |       |    |      |    | $\bigcirc$ |      |    |
|-------------|------------|-----------|-------|----|------|----|------------|------|----|
| Part        | Thread     | Hose I.D. | A E W |    | W    | E  | 3          |      |    |
| Number      | mm         | inch      | inch  | mm | inch | mm | mm         | inch | mm |
| 1CE70-18-10 | 18 M26x1,5 | 5/8       | 3.58  | 91 | 0.98 | 25 | 32         | 2.05 | 52 |




С

R

w





Α

### 1CF70

Female Metric L - Swivel - 90° Elbow - (24° Cone with O-Ring) ISO 12151-2 - SWE

| <b>#</b><br>Part | <u>·····</u><br>Thread |         | Hose I.D. | A    |    | Ę    |    | w  | В    |    |
|------------------|------------------------|---------|-----------|------|----|------|----|----|------|----|
| Number           |                        | mm      | inch      | inch | mm | inch | mm | mm | inch | mm |
| 1CF70-15-8       | 15                     | M22x1,5 | 1/2       | 2.91 | 74 | 1.77 | 45 | 27 | 1.54 | 39 |
| 1CF70-18-10      | 18                     | M26x1,5 | 5/8       | 3.11 | 79 | 1.93 | 49 | 32 | 1.65 | 42 |

### 1D270


Male Metric S - Rigid - (24° Cone ) ISO 12151-2


| #           |        |         |           |      |    | $\bigcirc$ |      |    |
|-------------|--------|---------|-----------|------|----|------------|------|----|
| Part        | Thread |         | Hose I.D. | Ą    |    | Н          | B    |    |
| Number      | mm     |         | inch      | inch | mm | mm         | inch | mm |
| 1D270-16-8  | 16     | M24x1,5 | 1/2       | 2.44 | 62 | 24         | 1.10 | 28 |
| 1D270-20-10 | 20     | M30x2   | 5/8       | 2.95 | 75 | 30         | 1.26 | 32 |


# 1D970

Male BSP Parellel Pipe - Rigid - (60° Cone) ISO 228-1

| #         |        |           |      |    | $\bigcirc$ |      |    |  |
|-----------|--------|-----------|------|----|------------|------|----|--|
| Part      | Thread | Hose I.D. | Ą    |    | н          | B    |    |  |
| Number    | inch   | inch      | inch | mm | mm         | inch | mm |  |
| 1D970-8-8 | 1/2x14 | 1/2       | 2.44 | 62 | 27         | 1.10 | 28 |  |







Β

Α

D

E

