



















	20120 B-128			20320 B-128		20620 B-129		23720 B-129
	23920 B-130			24120 B-130		20420 B-130		20820 B-131
	27920 B-131			28120 B-132		21120 B-132		22820 B-132
	26720 B-132			26920 B-133		23220 B-133		26120 B-133
	21520 B-133			21720 B-134		21920 B-134		2JS20 B-134
	2J720 B-134			2J920 B-135		2J120 B-135		20 Series Assembly Instructions B-136

A Hose

B Fittings 20 Series

C Equipment

D Accessories

E Technical

A Hose

B Fittings 20 Series


C Equipment

D Accessories

E Technical

20120


Male NPTF Pipe - Rigid



#	Part Number	Thread inch	Hose I.D. inch	A inch mm	H inch mm	J inch mm	B inch mm	Additional Material Brass (B)
20120-2-4	1/8x27	3/16	1.72	44	7/16	5/8	0.94	24
20120-2-5	1/8x27	1/4	1.82	46	1/2	11/16	0.99	25
20120-4-4	1/4x18	3/16	1.93	49	9/16	5/8	1.15	29
20120-4-5	1/4x18	1/4	2.01	51	9/16	11/16	1.18	30
20120-4-6	1/4x18	5/16	2.11	54	9/16	13/16	1.19	30
20120-6-6	3/8x18	5/16	2.20	56	3/4	13/16	1.28	33
20120-6-8	3/8x18	13/32	2.48	63	3/4	15/16	1.39	35
20120-8-8	1/2x14	13/32	2.73	69	7/8	15/16	1.64	42
20120-8-10	1/2x14	1/2	2.88	73	7/8	1-1/8	1.66	42
20120-12-10	3/4x14	1/2	2.95	75	1-1/16	1-1/8	1.73	44
20120-12-12	3/4x14	5/8	3.25	83	1-1/16	1-1/4	1.75	44
20120-12-16	3/4x14	7/8	2.81	71	1-3/8	1-7/16	1.62	41
20120-16-16	1x11-1/2	7/8	2.99	76	1-3/8	1-7/16	1.80	46
20120-20-20	1-1/4x11-1/2	1-1/8	3.24	82	1-3/4	1-3/4	1.96	50
20120-24-24	1-1/2x11-1/2	1-3/8	3.50	89	2	2	2.13	54
20120-32-32	2x11-1/2	1-13/16	4.05	103	2-1/2	2-1/2	2.31	59

20320

Male JIC 37° - Rigid




#	Part Number	Thread inch	Hose I.D. inch	A inch mm	H inch mm	J inch mm	B inch mm
20320-4-4	1/4	7/16x20	3/16	1.83	46	1/2	5/8
20320-5-5	5/16	1/2x20	1/4	1.94	49	9/16	11/16
20320-6-6	3/8	9/16x18	5/16	2.11	54	5/8	13/16
20320-8-8	1/2	3/4x16	13/32	2.57	65	13/16	15/16
20320-10-10	5/8	7/8x14	1/2	2.88	73	15/16	1-1/8
20320-12-12	3/4	1-1/16x12	5/8	3.35	85	1-1/8	1-1/4
20320-16-16	1	1-5/16x12	7/8	2.95	75	1-3/8	1-7/16

20620

Female JIC 37° - Swivel


#	Part Number	Thread inch	Hose I.D. inch	A inch mm	H inch mm	J inch mm	W inch mm	B inch mm	Additional Material Stainless Steel (C)
20620-4-4	1/4	7/16x20	3/16	1.94 49	9/16	5/8	9/16	1.16 29	•
20620-4-5	1/4	7/16x20	1/4	2.04 52	9/16	11/16	9/16	1.21 31	
20620-5-5	5/16	1/2x20	1/4	2.12 54	5/8	11/16	5/8	1.29 33	
20620-6-5	3/8	9/16x18	1/4	2.19 56	11/16	11/16	11/16	1.36 35	
20620-6-6	3/8	9/16x18	5/16	2.32 59	11/16	13/16	11/16	1.40 36	•
20620-8-6	1/2	3/4x16	5/16	2.44 62	7/8	13/16	7/8	1.52 39	
20620-8-8	1/2	3/4x16	13/32	2.79 71	7/8	15/16	7/8	1.70 43	•
20620-8-10	1/2	3/4x16	1/2	2.99 76	7/8	1-1/8	7/8	1.77 45	
20620-10-8	5/8	7/8x14	13/32	2.94 75	7/8	15/16	1	1.85 47	
20620-10-10	5/8	7/8x14	1/2	3.10 79	1	1-1/8	1	1.88 48	•
20620-10-12	5/8	7/8x14	5/8	3.40 86	1	1-1/4	1	1.90 48	
20620-12-12	3/4	1-1/16x12	5/8	3.49 89	1-1/4	1-1/4	1-1/4	1.99 51	•
20620-16-16	1	1-5/16x12	7/8	3.20 81	1-1/2	1-7/16	1-1/2	2.01 51	•
20620-20-20	1-1/4	1-5/8x12	1-1/8	3.56 90	2	1-3/4	2	2.28 58	
20620-24-24	1-1/2	1-7/8x12	1-3/8	3.95 100	2-1/4	2	2-1/4	2.58 66	
20620-32-32	2	2-1/2x12	1-13/16	4.71 120	2-7/8	2-1/2	2-7/8	2.97 75	



23720

Female JIC 37° - Swivel - 45° Elbow - Short Drop

#	Part Number	Thread inch	Hose I.D. inch	A inch mm	E inch mm	H inch mm	J inch mm	W inch mm	B inch mm
23720-4-4	1/4	7/16x20	3/16	2.08 53	0.33 8	3/8	5/8	9/16	1.30 33
23720-5-5	5/16	1/2x20	1/4	2.30 58	0.36 9	7/16	11/16	5/8	1.47 37
23720-6-6	3/8	9/16x18	5/16	2.45 62	0.39 10	1/2	13/16	11/16	1.53 39
23720-8-6	1/2	3/4x16	5/16	2.77 70	0.55 14	5/8	13/16	7/8	1.85 47
23720-10-10	5/8	7/8x14	1/2	3.36 85	0.65 17	3/4	1-1/8	1	2.14 54
23720-12-12	3/4	1-1/16x12	5/8	3.94 100	0.79 20	7/8	1-1/4	1-1/4	2.44 62
23720-16-16	1	1-5/16x12	7/8	3.73 95	0.90 23	1-1/8	1-7/16	1-1/2	2.54 65
23720-20-20	1-1/4	1-5/8x12	1-1/8	4.17 106	1.19 30	1-1/2	1-3/4	2	2.89 73



A Hose

B Fittings 20 Series


C Equipment

D Accessories

E Technical

23920


Female JIC 37° - Swivel - 90° Elbow - Short Drop



#	Part Number	Thread inch	Hose I.D. inch	A inch	E mm	H inch	J inch	W inch	B inch	B mm	
23920-4-4	1/4	7/16x20	3/16	1.91	49	0.83	21	5/8	9/16	1.13	29
23920-5-5	5/16	1/2x20	1/4	2.30	58	0.77	20	7/16	11/16	1.47	37
23920-6-6	3/8	9/16x18	5/16	2.35	60	0.90	23	1/2	13/16	11/16	43
23920-8-8	1/2	3/4x16	13/32	2.88	73	1.09	28	5/8	15/16	7/8	45
23920-10-10	5/8	7/8x14	1/2	3.20	81	1.24	31	3/4	1-1/8	1	50
23920-12-12	3/4	1-1/16x12	5/8	3.86	98	1.82	46	7/8	1-1/4	1-1/4	60
23920-16-16	1	1-5/16x12	7/8	3.69	94	2.14	54	1-1/8	1-7/16	1-1/2	64
23920-20-20	1-1/4	1-5/8x12	1-1/8	4.01	102	2.59	66	1-1/2	1-3/4	2	69
23920-24-24	1-1/2	1-7/8x12	1-3/8	4.43	113	2.82	72	1-3/4	2	2-1/4	3.06
											78

24120


Female JIC 37° - Swivel - 90° Elbow - Long Drop



#	Part Number	Thread inch	Hose I.D. inch	A inch	E mm	H inch	J inch	W inch	B inch	B mm	
24120-4-4	1/4	7/16x20	3/16	2.08	53	1.80	46	3/8	5/8	9/16	33
24120-6-6	3/8	9/16x18	5/16	2.34	59	2.18	55	1/2	13/16	11/16	36
24120-8-8	1/2	3/4x16	13/32	2.95	75	2.43	62	5/8	15/16	7/8	47
24120-10-10	5/8	7/8x14	1/2	3.26	83	2.58	66	3/4	1-1/8	1	52
24120-12-12	3/4	1-1/16x12	5/8	3.78	96	3.74	95	7/8	1-1/4	1-1/4	58

20420

Male SAE 45° - Rigid




#	Part Number	Thread inch	Hose I.D. inch	A inch	H mm	H inch	J inch	B inch	B mm
20420-4-4	1/4	7/16x20	3/16	1.80	46	1/2	5/8	1.02	26
20420-5-5	5/16	1/2x20	1/4	1.94	49	9/16	11/16	1.11	28
20420-6-6	3/8	5/8x18	5/16	2.17	55	11/16	13/16	1.25	32
20420-8-8	1/2	3/4x16	13/32	2.67	68	13/16	15/16	1.58	40
20420-10-10	5/8	7/8x14	1/2	3.00	76	15/16	1-1/8	1.78	45
20420-12-12	3/4	1-1/16x12	5/8	3.50	89	1-1/8	1-1/4	2.00	51

20820

Female SAE 45° - Swivel


#	Thread inch	Hose I.D. inch	A inch mm	H inch mm	J inch mm	W inch mm	B inch mm
Part Number							
20820-4-4	1/4	7/16x20	3/16 1.94 49	9/16 5/8	9/16 1.16	1.16 29	
20820-4-5	1/4	7/16x20	1/4 2.04 52	9/16 11-16	9/16 1.21	1.21 31	
20820-5-5	5/16	1/2x20	1/4 2.12 54	5/8 11-16	5/8 1.29	1.29 33	
20820-6-6	3/8	5/8x18	5/16 2.36 60	3/4 13/16	3/4 1.44	1.44 37	
20820-8-8	1/2	3/4x16	3/8 2.79 71	7/8 15/16	7/8 1.70	1.70 43	
20820-8-10	1/2	3/4x16	1/2 2.99 76	7/8 1-1/8	7/8 1.77	1.77 45	
20820-10-10	5/8	7/8x14	1/2 3.10 79	1 1-1/8	1 1.88	1.88 48	
20820-12-12	3/4	1-1/16x14	5/8 3.49 89	1-1/4 1-1/4	1-1/4 1.99	1.99 51	



27720

Female SAE 45° - Swivel - 45° Elbow


#	Thread inch	Hose I.D. inch	A inch mm	E inch mm	H inch mm	J inch mm	W inch mm	B inch mm
Part Number								
27720-6-6	3/8	5/8X18	5/16 2.45 62	0.39 10	1/2 13/16	3/4 1.53	1.53 39	
27720-8-6	1/2	3/4x16	5/16 2.77 71	0.55 14	5/8 13/16	7/8 1.86	1.86 47	
27720-8-8	1/2	3/4x16	13/32 3.09 78	0.55 14	5/8 15/16	7/8 2.00	2.00 51	
27720-10-10	5/8	7/8x14	1/2 3.35 85	0.65 17	3/4 1-1/8	1 2.13	2.13 54	




27920

Female SAE 45° - Swivel - 90° Elbow

#	Thread inch	Hose I.D. inch	A inch mm	E inch mm	H inch mm	J inch mm	W inch mm	B inch mm
Part Number								
27920-4-4	1/4	7/16x20	3/16 1.91 49	0.83 21	3/8 5/8	9/16 1.13	1.13 29	
27920-5-5	5/16	1/2x20	1/4 2.30 58	0.77 20	7/16 11-16	5/8 1.47	1.47 37	
27920-6-6	3/8	5/8x18	5/16 2.33 59	0.85 22	1/2 13/16	3/4 1.41	1.41 36	
27920-8-8	1/2	3/4x16	13/32 2.86 73	1.09 28	5/8 15/16	7/8 1.77	1.77 45	
27920-10-10	5/8	7/8x14	1/2 3.20 81	1.24 31	3/4 1-1/8	1 1.98	1.98 50	
27920-12-12	3/4	1-1/16x14	5/8 3.87 98	1.82 46	7/8 1-1/4	1-1/4 2.37	2.37 60	



Notch in nut signifies 45° flare.




28120

Female SAE 45° - Swivel - 90° Elbow - Long Drop

#	Thread	Hose I.D.	A	E	H	J	W	B
Part Number	inch	inch	inch	mm	inch	inch	inch	mm
28120-6-6	3/8 5/8x18	5/16	2.34	59	2.18	55	1/2	13/16
28120-8-8	1/2 3/4x16	13/32	2.95	75	2.43	62	5/8	15/16

Notch in nut signifies 45° flare.




21120

Male Ferulok Flareless - Rigid
(24° Cone with Nut and Ferrule)

#	Thread	Hose I.D.	A	H	J	W	B	
Part Number	inch	inch	inch	mm	inch	inch	inch	mm
21120-6-6	3/8 9/16x18	5/16	2.05	52	5/8	13/16	11/16	29
21120-8-8	1/2 3/4x16	13/32	2.52	64	13/16	15/16	7/8	36


The Parker Ferrule-Fix fitting makes it possible to salvage the bent tube section from a hose assembly for quick, easy on the job repairs. For additional information see Ferrule-Fix installation instructions in the Technical Section.



22820

Male Inverted SAE 45° - Swivel

#	Thread	Hose I.D.	A	H	J	W	B	
Part Number	inch	inch	inch	mm	inch	inch	inch	mm
22820-4-4	1/4 7/16x24	3/16	2.45	62	3/8	5/8	7/16	1.67
22820-5-5	5/16 1/2x20	1/4	2.70	69	7/16	11/16	1/2	1.87
22820-6-6	3/8 5/8x18	5/16	2.95	75	1/2	13/16	5/8	2.03
22820-8-8	1/2 3/4x18	13/32	3.36	85	5/8	15/16	3/4	2.27
22820-10-10	5/8 7/8x18	1/2	3.64	92	3/4	1-1/8	7/8	2.42



26720


Male Inverted SAE 45° - Swivel - 45° Elbow

#	Thread	Hose I.D.	A	E	H	J	W	B
Part Number	inch	inch	inch	mm	inch	inch	inch	mm
26720-4-4	1/4 7/16x24	3/16	2.21	56	0.62	16	3/8	5/8
26720-5-5	5/16 1/2x20	1/4	2.44	62	0.70	18	7/16	11/16
26720-6-6	3/8 5/8x18	5/16	3.00	76	0.94	24	1/2	13/16
26720-8-8	1/2 3/4x18	13/32	3.51	89	1.09	28	5/8	15/16

26920

Male Inverted SAE 45° - Swivel - 90° Elbow


#			Hose I.D. inch	A inch mm	E inch mm	H inch	J inch	W inch	B inch mm
Part Number	Thread inch								
26920-4-4	1/4	7/16x24	3/16	2.29 58	1.56 40	3/8	5/8	7/16	1.51 38
26920-5-5	5/16	1/2x20	1/4	2.55 65	1.65 42	7/16	11/16	1/2	1.72 44
26920-5-6	5/16	1/2x20	5/16	2.63 67	1.65 42	1/2	13/16	1/2	1.71 43
26920-6-6	3/8	5/8x18	5/16	2.67 68	1.69 43	1/2	13/16	5/8	1.75 44
26920-8-8	1/2	3/4x18	13/32	3.09 78	1.88 48	5/8	15/16	3/4	2.00 51



23220

Female PTT 30° - Swivel

#			Hose I.D. inch	A inch mm	H inch	J inch	W inch	B inch mm
Part Number	Thread inch							
23220-16-16	1	1-5/16x14	7/8	2.98 76	1-1/2	1-7/16	1-1/2	1.79 45




26120

Male SAE Compression Seat

(without Nut or Sleeve)

#			Hose I.D. inch	A inch mm	H inch	J inch	B inch mm
Part Number	Thread inch						
26120-10-10	5/8	13/16x18	1/2	2.64 67	7/8	1-1/8	1.42 36




21520

SAE Code 61 Flange Head

ISO 12151-3-S-L

#			Hose I.D. inch	A inch mm	F inch	H inch	J inch	B inch mm
Part Number	Flange inch							
21520-20-20	1-1/4	1-1/8	3.58 91	2	1-1/2	1-3/4	2.30	58
21520-40-40	2-1/2	2-3/8	5.22 133	3-5/16	2-3/4	3-1/8	3.41	87



See Accessories Section for O-Rings and Flange Kits.


A Hose

B Fittings 20 Series

C Equipment

D Accessories

E Technical




21720

SAE Code 61 Flange Head - 45° Elbow

ISO 12151-3- E45S - L (1 Piece: ISO 12151-3- E45M - L)

#	Part Number	Flange inch	Hose I.D. inch	A inch mm	E inch mm	F inch	H inch	J inch	B inch mm
21720-20-20	1-1/4	1-1/8	4.10 104	1.12 28	2	1-1/2	1-3/4	2.82 72	
21720-40-40	2-1/2	2-3/8	5.83 148	1.41 36	3-3/8	2-3/4	3-1/8	4.02 102	




21920

SAE Code 61 Flange Head - 90° Elbow

ISO 12151-3- E90S - L (1 Piece: ISO 12151-3- E90M - L)

#	Part Number	Flange inch	Hose I.D. inch	A inch mm	E inch mm	F inch	H inch	J inch	B inch mm
21920-8-8	1/2	13/32	2.95 75	1.62 41	1-3/16	5/8	15/16	1.86 47	
21920-32-32	2	1-13/16	5.44 138	3.19 81	2-13/16	2-1/4	2-1/2	3.70 94	
21920-40-40	2-1/2	2-3/8	6.18 157	3.75 95	3-5/16	2-3/4	3-1/8	4.37 111	




2JS20

Female Seal-Lok® - Swivel - Long

ISO 12151-1 - SWSB

#	Part Number	Thread inch	Hose I.D. inch	A inch mm	H inch	J inch	W inch	B inch mm
2JS20-4-4	1/4	9/16x18	3/16	2.07 53	9/16	5/8	11/16	1.29 33
2JS20-6-6	3/8	11/16x16	5/16	2.36 60	1/2	13/16	13/16	1.44 37
2JS20-8-8	1/2	13/16x16	13/32	2.92 74	5/8	15/16	15/16	1.83 46
2JS20-10-10	5/8	1x14	1/2	3.15 80	3/4	1-1/8	1-1/8	1.93 49
2JS20-12-12	3/4	1-3/16x12	5/8	3.66 93	1-1/8	1-1/4	1-3/8	2.16 55



2J720

Female Seal-Lok® - Swivel - 45° Elbow

ISO 12151-1 - SWE45


#	Part Number	Thread inch	Hose I.D. inch	A inch mm	E inch mm	H inch	J inch	W inch	B inch mm
2J720-4-4	1/4	9/16x18	3/16	2.24 57	0.41 10	7/16	5/8	11/16	1.46 37
2J720-6-6	3/8	11/16x16	5/16	2.52 64	0.43 11	1/2	13/16	13/16	1.60 41
2J720-8-8	1/2	13/16x16	13/32	3.19 81	0.59 15	5/8	15/16	15/16	2.10 53
2J720-10-10	5/8	1x14	1/2	3.46 88	0.65 17	3/4	1-1/8	1-1/8	2.24 57

See Accessories Section for O-Rings and Flange Kits.

2J920

Female Seal-Lok® - Swivel 90° Elbow - Short Drop
ISO 12151-1 - SWE90


#	Thread inch	Hose I.D. inch	A inch mm	E inch mm	H inch	J inch	W inch	B inch mm
Part Number								
2J920-4-4	1/4	9/16x18	3/16	2.22 56	0.82 21	7/16	5/8	11/16 1.44 37
2J920-6-6	3/8	11/16x16	5/16	2.39 61	0.90 23	1/2	13/16	13/16 1.47 37
2J920-8-8	1/2	13/16x16	13/32	2.91 74	1.15 29	5/8	15/16	15/16 1.82 46
2J920-10-10	5/8	1x14	1/2	3.16 80	1.27 32	3/4	1-1/8	1-1/8 1.94 49
2J920-12-12	3/4	1-3/16x12	5/8	3.74 95	1.85 47	7/8	1-1/4	1-3/8 2.24 57



2J120

Female Seal-Lok® - Swivel - 90° Elbow - Long Drop
ISO 12151-1 - SWEL90

#	Thread inch	Hose I.D. inch	A inch mm	E inch mm	H inch	J inch	W inch	B inch mm
Part Number								
2J120-4-4	1/4	9/16x18	3/16	2.01 51	1.80 46	7/16	5/8	11/16 1.23 31
2J120-6-6	3/8	11/16x16	5/16	2.48 63	2.13 54	1/2	13/16	13/16 1.56 40
2J120-8-8	1/2	13/16x16	13/32	2.96 75	2.51 64	5/8	15/16	15/16 1.87 47



See Accessories Section for O-Rings.





A Hose

B Fittings 20 Series

C Equipment

D Accessories

E Technical

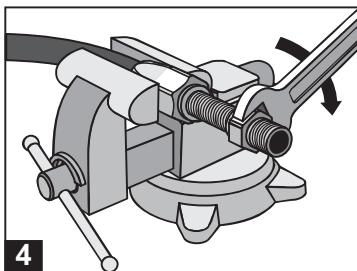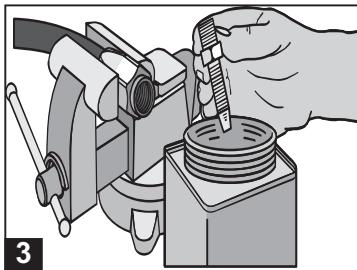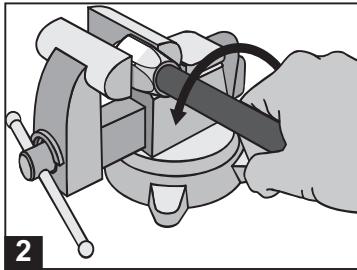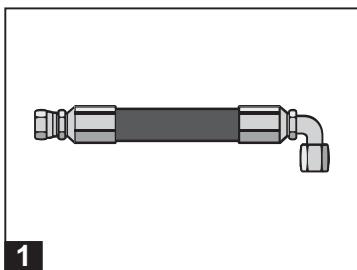

20 Series Hose Assembly Instructions

1. Identify over all length (OAL) of hose assembly and the cut off allowance (COA) length of fitting(s) on hose ends by use of the fitting data table. Properly measure, mark and cut hose to desired length using fine tooth hacksaw or cutoff machine. Care should be taken to ensure a square, clean cut is obtained.
2. Air or solvent flush cut end of hose as necessary to produce a clean hose ID prior to assembly. Place socket in vice and screw in hose counter clockwise until hose bottoms. Back hose out $\frac{1}{2}$ turn.
3. Oil inside of hose and nipple threads liberally with Hoze-Oil. (See Section C). Do not oil hose cover.
4. Screw nipple assembly into socket using a wrench on the nipple hex until the nipple hex shoulders against the socket. A $\frac{1}{32}$ " to $\frac{1}{16}$ " gap between the nipple hex and socket is allowed for displacement angle adjustment when two elbow fittings are used.

Inspection. Examine hose assembly internally for cut or bulged tube, obstructions and cleanliness. Clean ID of hose as necessary. Swivel nuts should turn freely. Check the layline of the hose to be sure the assembly is not twisted. Cap the ends of the assembly to keep clean.

Special Instructions for stainless steel fittings. When assembling fittings made with 316 stainless steel, lubricate the threads of both the socket and nipple with Accrolube High Efficiency Lubricant (see Section C) or equivalent metal assembly lubricant.

Note: DISASSEMBLE IN REVERSE ORDER

IF YOU HAVE QUESTIONS CONCERNING THE PRODUCTS OR APPLICATION OF THE PRODUCTS CONTAINED IN THIS CATALOG, PLEASE CALL: PARKER HOSE PRODUCTS DIVISION - TECHNICAL SERVICES DEPARTMENT

PHONE: 440/943-5700

FAX: 440/943-3129

<http://www.parkerhose.com>